



MAXGE

Switch on to the future

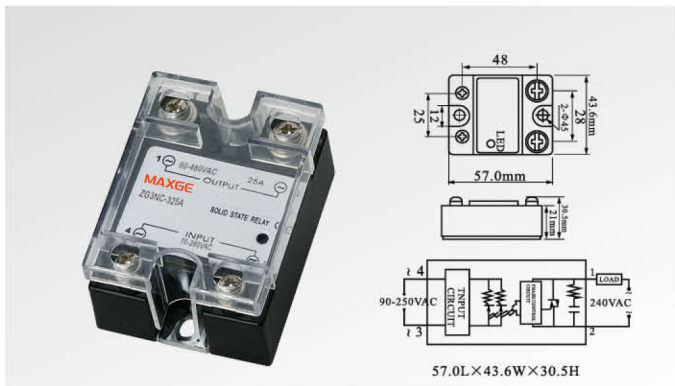


ZG3NC-3 A (High-Voltage Type)

Load Current	10A, 15A, 20, 25A, 30A, 40A, 50A, 60A, 75A, 80A, 90A, 100A, 120A
Load Voltage	480VAC
Control Voltage	90-250VAC
Control Current	≤ 12mA
On Voltage	≤ 1.5VAC
Off-state Leakage Current	≤ 4mA
Time Off	≤ 10ms
Dielectric Strength	2500VAC
Insulation Resistance	100MΩ/500VDC
Ambient Temperature	-25~+75°C
Mounting Methods	BOLTING MOUNTING
The work instructions	LED
Weight	90g(10A, 25A)135g(40A 以上)

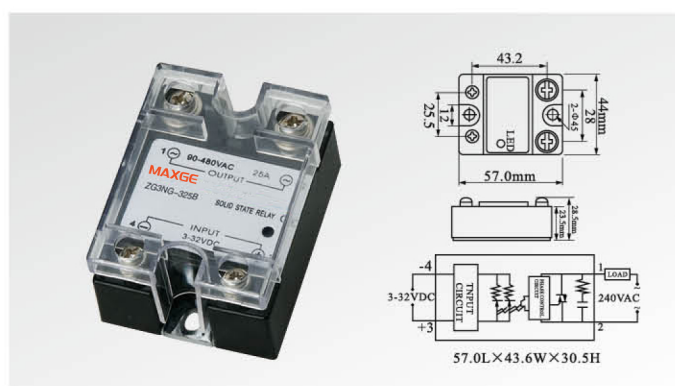


ZG3NC-3 B (High-Voltage Type)

Load Current	10A, 15A, 20, 25A, 30A, 40A, 50A, 60A, 75A, 80A, 90A, 100A, 120A
Load Voltage	480VAC
Control Voltage	3-32VDC
Control Current	3-25mA
On Voltage	≤ 1.5VAC
Off-state Leakage Current	≤ 4mA
Time Off	≤ 10ms
Dielectric Strength	2500VAC
Insulation Resistance	100MΩ/500VDC
Ambient Temperature	-25~+75°C
Mounting Methods	BOLTING MOUNTING
The work instructions	LED
Weight	90g(10A, 25A)135g(40A 以上)

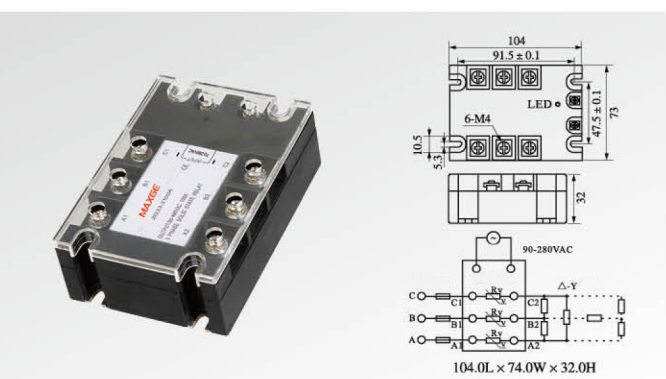

ZG33-3 A

Load Current	10A, 15A, 20A, 25A, 30, 40A, 50A, 60A, 75A, 80A, 100A, 120A
Load Voltage	480VAC
Control Voltage	90-280VAC
Control Current	≤ AC12mA
On Voltage	≤ 1.8VAC
Off-state Leakage Current	≤ 10mA
Time Off	≤ 10ms
Dielectric Strength	2500VAC
Insulation Resistance	100MΩ/500VAC
Ambient Temperature	-25~+75°C
Mounting Methods	BOLTING MOUNTING
The work instructions	LED
Weight	450g

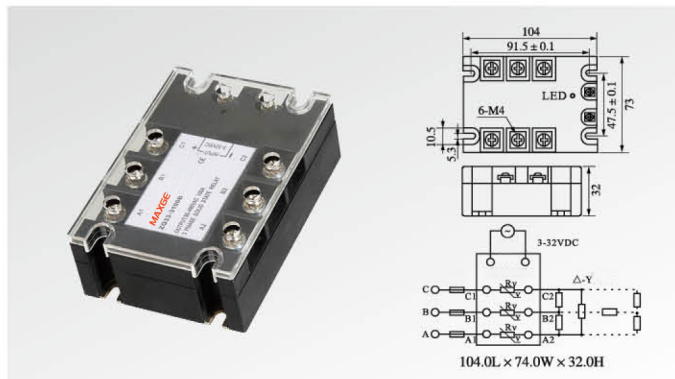

ZG33-3 B

Load Current	10A, 15A, 20A, 25A, 30, 40A, 50A, 60A, 75A, 80A, 100A, 120A
Load Voltage	80VAC
Control Voltage	3-32VDC
Control Current	10-68mA
On Voltage	≤ 1.8VAC
Off-state Leakage Current	≤ 10mA
Time Off	≤ 10ms
Dielectric Strength	2500VAC
Insulation Resistance	100MΩ/500VAC
Ambient Temperature	-25~+75°C
Mounting Methods	BOLTING MOUNTING
The work instructions	LED
Weight	450g